

KZS-2M AC C32/0.03



Specifications

ETI Code	002173127
Description	KZS-2M AC C32/0.03
Weight	225
Level	Residual and overcurrent protection RCBO
Function	RCBO
Short circuit capacity (kA)	10
Tripping characteristic	C
Rated current (A)	32
Rated residual current (A)	0,03
Current type	Type AC
No. Of poles	1+N
Catalogue Group	KZS-2M Residual current circuit breakers with overcurrent protection, 2 modules, A and AC type
Fault type signalisation	No

Online product page

Other documentation



[Technical data catalogue](#)
[3D Model](#)
[Instruction manual](#)
[EU declaration](#)





ETIM international classification

Built-in depth	69mm
Nominal rated current	32 A
Nominal rated voltage	230V
Release characteristic	C
Rated fault current	0,03A
Leakage current type	Other
Current limiting class	3
Over voltage category	
Pollution degree	
Width in number of modular spacings	2
Frequency	50 Hz
Degree of protection (IP)	IP20
Number of protected poles	1
Concurrently switching N-neutral	true

Rated short-circuit breaking capacity EN 60898	10kA
Rated short-circuit breaking capacity IEC 60947-2	kA
Number of poles (total)	1+N

Dimension drawing

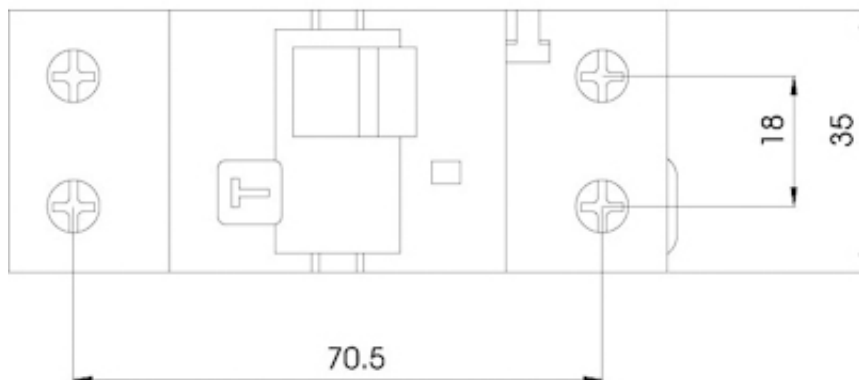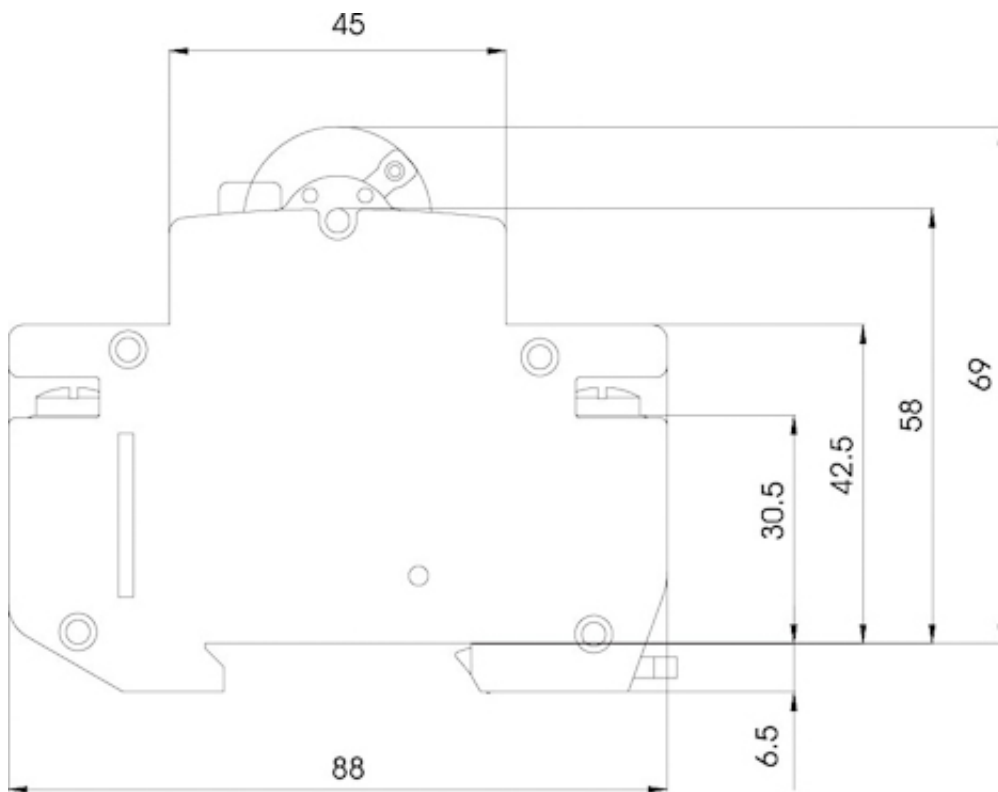

Symbol/Connection

