

KZS-4M 3p+N A C32/0.03



Specifications

ETI Code	002174927
Description	KZS-4M 3p+N A C32/0.03
Weight	515
Level	Residual and overcurrent protection RCBO
Function	RCBO
Short circuit capacity (kA)	6
Tripping characteristic	C
Rated current (A)	32
Rated residual current (A)	0,03
Current type	Type A
No. Of poles	3+N
Catalogue Group	KZS-4M 3p+N Residual current circuit breakers with overcurrent protection, 4 modules, A and AC type
Fault type signalisation	No

Online product page

Other documentation



Technical data catalogue
 Instruction manual
 EU declaration



ETIM international classification

Built-in depth	69mm
Nominal rated current	32 A
Nominal rated voltage	400V
Release characteristic	C
Rated fault current	0,03A
Leakage current type	Other
Current limiting class	3
Over voltage category	
Pollution degree	
Width in number of modular spacings	4
Frequency	50 Hz
Degree of protection (IP)	IP20
Number of protected poles	3
Concurrently switching N-neutral	true
Rated short-circuit breaking capacity EN 60898	6kA



Rated short-circuit breaking capacity IEC 60947-2

kA

Number of poles (total)

3+N

Dimension drawing

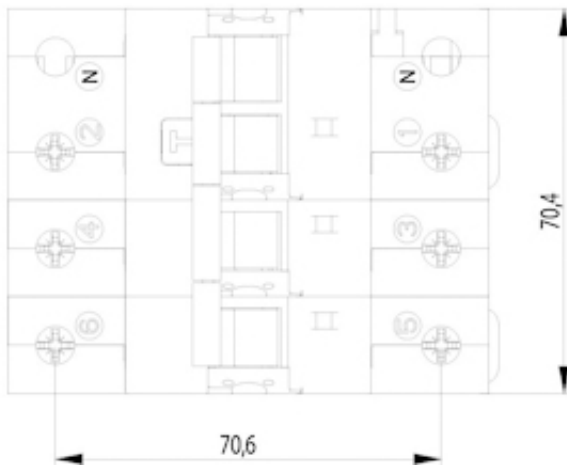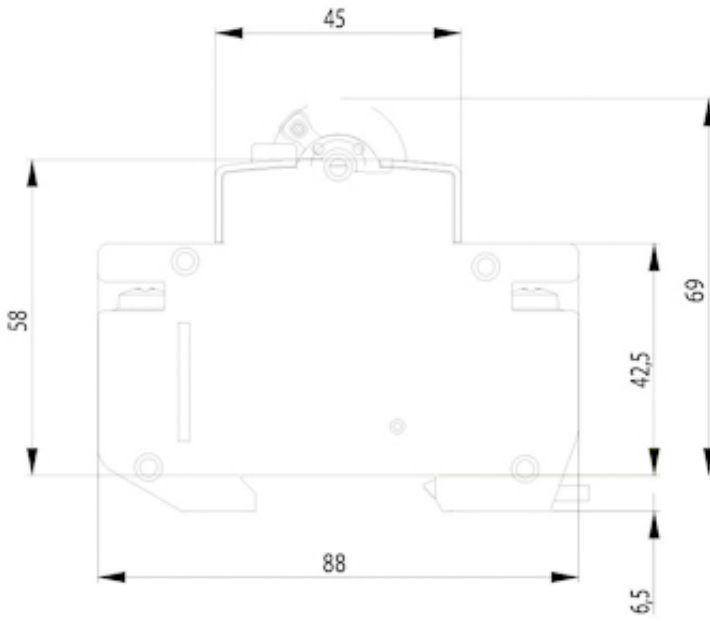

Symbol/Connection

