


Fuse Switch Disconnectors - Technical Specifications




Type		SFH 160	SFH 250	SFH 400
Standard		TS EN 60947-3, EN 60947-3		
NH Fuse Link Size		NH00C- NH00	NH1	NH2
No of Poles		3	3	3
Rated Operational Current	A	160	250	400
Rated Voltage	V	690	690	690
Rated Insulation Voltage	V	800	800	800
Breaking Capacity of Fuse Link	kA	120	120	120
Utilization Category		AC23B	AC23B	AC23B
Weight	kg	0,7	1,5	3,3

Size	Rated Current In (A)	Fuse Size	Minimum Order (pcs)	Number in Cartoon (pcs)	Order Code
SFH-160	160	NH00C/NH00	1	9	SFH160
SFH-250	250	NH1	1	3	SFH250
SFH-400	400	NH2	1	1	SFH400

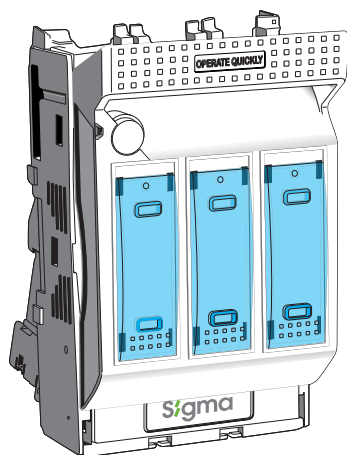


Dimensions

SFH160

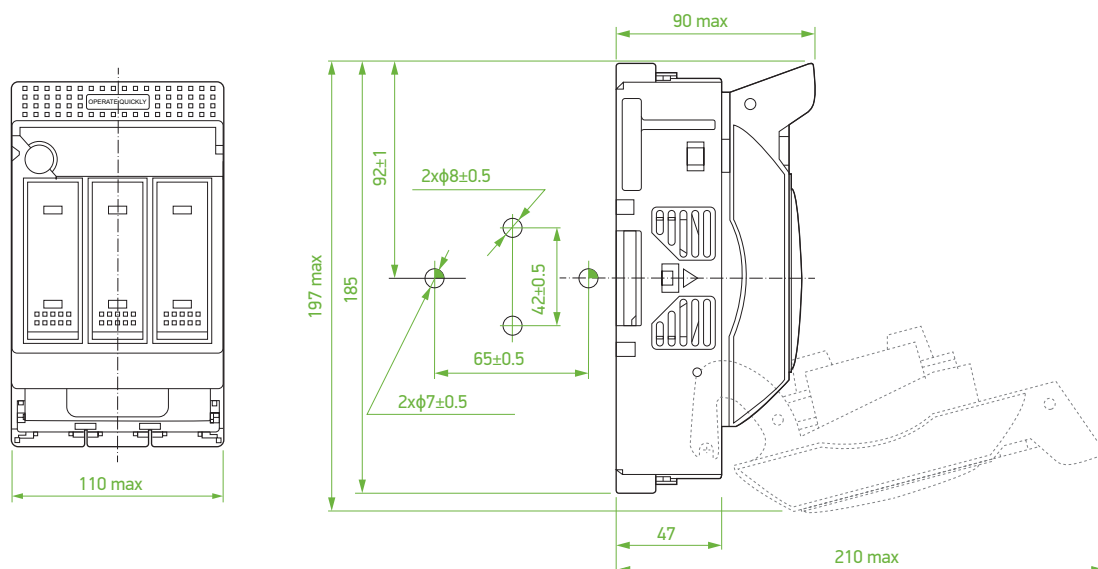

SFH250

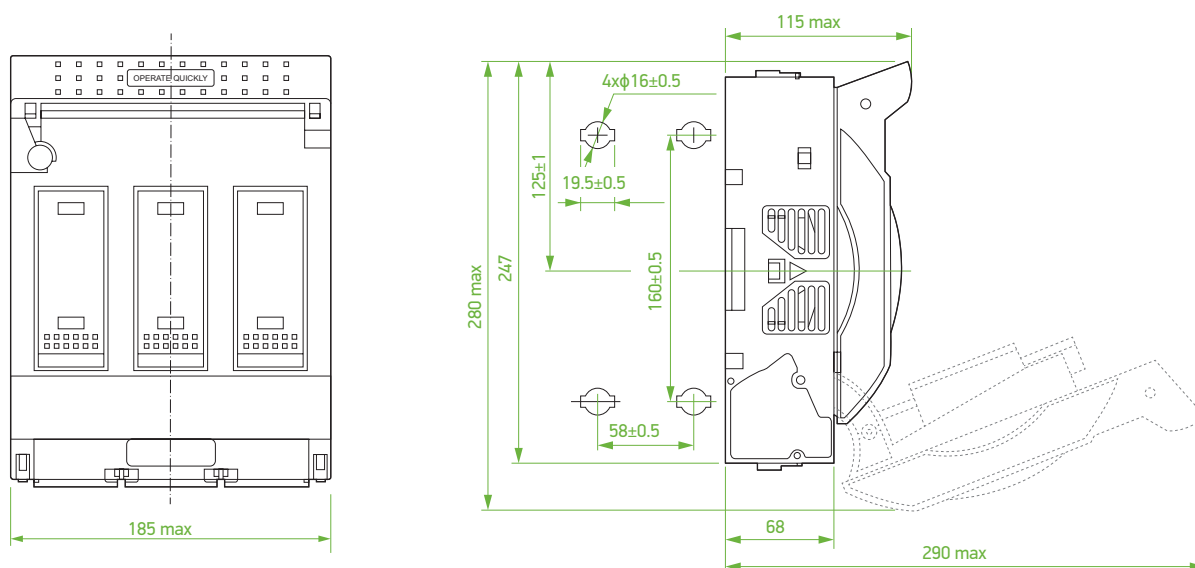

SFH400

