


6 kA Miniature Circuit Breaker

Technical Specifications

Type			SND 6000							
No Of Poles			1	2	3	4	1	2	3	4
Rated Current (at 30 °C)		A	2, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63				80, 100, 125			
Rated Voltage	Ue	AC (V)	415				415			
Rated Insulation Voltage	Ui	V	690							
Rated Impulse Voltage	Uimp	kV	6							
Rated Breaking Capacity	Icn	kA	6							
Selectivity Class			3							
Electrical Life	ope.	230 V	6.000				2.000			
Mechanical Life	ope.		20.000				10.000			
Protection Class			IP 20							
Ambient Operating Temperature		°C	between -5 and +40							
Storage Temperature		°C	between -40 and +55							
Colour			RAL 7035							
Assembly (EN 60715)			35 mm DIN Rail							
Connection Capacity (min - max)		mm²	1-25				1-50			
Max. Tigtenning Torque		Nm	2				3.5			

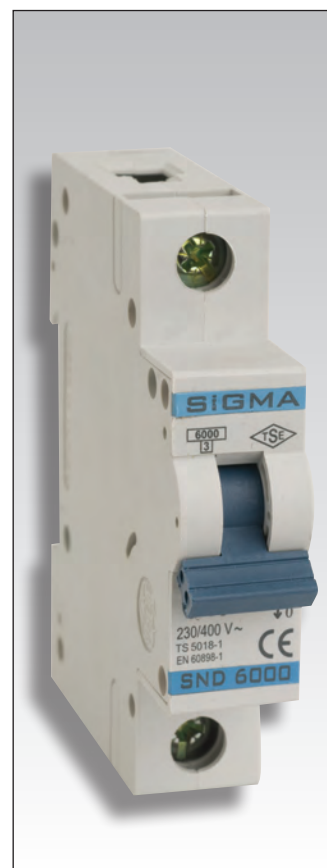

Tripping Characteristics

