


# Feed-in Grid inverter with Energy Storage at Good Price/Performance

## InfiniSolar V



InfiniSolar V-1K-12  
InfiniSolar V-2K-24    InfiniSolar V-3K-48  
InfiniSolar V-4K-48    InfiniSolar V-5K-48

- Pure sine wave output
- Self-consumption and Feed-in to the grid
- Programmable supply priority for PV, Battery or Grid
- User-adjustable charging current and voltage
- Programmable multiple operation modes: Grid-tie, off-grid and grid-tie with backup
- Monitoring software for real-time status display and control
- Parallel operation up to 6 units only for 3K/4K/5K models

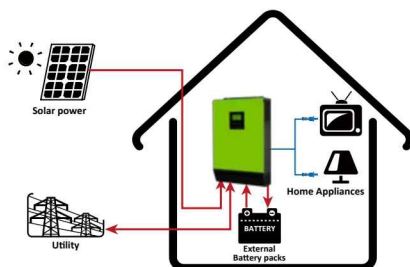

### InfiniSolar V On-Grid Inverter With Energy Storage Selection Guide

MODEL	InfiniSolar V-1K-12	InfiniSolar V-2K-24	InfiniSolar V-3K-48	InfiniSolar V-4K-48	InfiniSolar V-5K-48
Max. PV Array Power	1000W	2000W	4000W	4000W	6000W
Rated Output Power	1000W	2000W	3000W	4000W	5000W
Maximum PV Array Open Circuit Voltage	145 VDC	145 VDC	145 VDC	145 VDC	145 VDC
MPPT Range @ Operating Voltage	15 VDC ~ 115 VDC	30 VDC ~ 115 VDC	60 VDC ~ 115 VDC	60 VDC ~ 115 VDC	60 VDC ~ 115 VDC
MPP Tracker Number	1	1	1	1	2
<b>GRID-TIE OPERATION</b>					
<b>GRID OUTPUT (AC)</b>					
Nominal Output Voltage	220/230/240 VAC				
Output Voltage Range	184 - 264.5 VAC				
Nominal Output Current	4.3 A	8.7 A	13 A	17.4 A	21.7 A
Power Factor	> 0.99				
<b>EFFICIENCY</b>					
Maximum Conversion Efficiency (DC/AC)	90%				
<b>OFF-GRID, HYBRID OPERATION</b>					
<b>GRID INPUT</b>					
Acceptable Input Voltage Range	90 - 280 VAC or 170 - 280 VAC				
Frequency Range	50 Hz/60 Hz (Auto sensing)				
Maximum AC Input Current	30A		40A		
<b>BATTERY MODE OUTPUT (AC)</b>					
Nominal Output Voltage	220/230/240 VAC				
Output Waveform	Pure sine wave				
Efficiency (DC to AC)	93%				
<b>BATTERY &amp; CHARGER</b>					
Nominal DC Voltage	12 VDC	24 VDC	48 VDC	48 VDC	48 VDC
Maximum Solar Charge Current	80 A	80 A	80 A	80 A	120 A
Maximum AC Charge Current	60 A				
Maximum Charge Current	140 A	140 A	140 A	140 A	180 A
<b>GENERAL</b>					
<b>PHYSICAL</b>					
Dimension, D x W x H (mm)	100 x 300 x 440	100 x 300 x 440	120 x 295 x 468	120 x 295 x 468	190 x 295 x 483
Net Weight (kgs)	8	8	11	11	16
<b>INTERFACE</b>					
Parallel Function	N/A	N/A	Yes	Yes	Yes
External Safety Box (Optional)	Yes				
Communication	USB or RS232/Dry-Contact				
<b>ENVIRONMENT</b>					
Humidity	0 ~ 90% RH (No condensing)				
Operating Temperature	0 to 50°C				

Product specifications are subject to change without further notice

ON-GRID INVERTER WITH ENERGY STORAGE