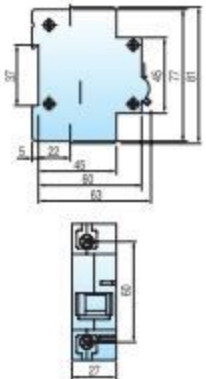





BKH		BKP	BF-a	BF-c	BFN
Overload and short circuit		Overload and short circuit	Overload and short circuit		Overload and short circuit
63, 80, 100, 125A		3, 6, 10, 16, 20, 25, 32A	10-100A		5, 10, 15, 20, 30, 40, 50A
C, D curve		B, C, D curve			
1P, 2P, 3P, 3P+N, 4P		1P+N	1p, 2p, 3p		1p, 2p, 3p
1pole	2-4pole				
63A - 125A 10kA at 230/400VAC	63A - 125A 10kA at 400VAC	3A - 32A 4.5kA at 230VAC (NF: 3kA)	10A-100A 10kA at 240VAC 2.5kA at 415VAC	10A-100A 5kA at 240VAC 2.5kA at 415VAC	
IEC 60947-2		IEC 60898	IEC 60947-2		IEC 60947-2
CCC, SEMKO CB, SABS, CE		CCC, SEMKO CB, NF, SABS, CE			SEMKO CB, CE
Thermal magnetic release		Thermal magnetic release	Thermal magnetic release		Thermal magnetic release
1,500 operations		4,000 operations	1,500 operations		1,500 operations
10,000 operations		10,000 operations	10,000 operations		10,000 operations
On 35mm DIN rail		On 35mm DIN rail	Holder mounting (Bolt on with fixing brackets)		Plug-in
27mm per pole		17.8mm	25mm per pole		25mm per pole
Lug type (Cable up to 50mm ²)		Lug type (Cable up to 10mm ²)	Clamp type		Lug type (14-6 AWG.)
					
See page 45		See page 45	See page 46		See page 47
IEC 60947-2 (SABS)					